

YE-HPC23 METRIC

BEST VALUE IN THE WORLD OF CUTTING TOOLS

FOR ALUMINUM, ALUMINUM DIE CAST, NON-FERROUS ALLOYS AND PLASTICS



ALU-POWER HPC

**3-FLUTE, HIGH-PERFORMANCE,
SOLID CARBIDE END MILLS**

**Keep Your Edge:
SPEED, STRENGTH &
SHARPNESS.**

- 3 Flute
- Square End & Corner Radius
- Standard and Extended Length
- Coated and Uncoated
- Chip Breakers **NEW**

Through Special Chip Breaker Design, the length of the chip is formed short to improve chip evacuation performance.

Chip Breaker Profile Improved on Weak-Point of the Cutting Edge



ALU-POWER HPC

Built to Handle High-Speed Cutting Without Buildup.


- ▶ Excels in Ultra High-Speed, High HP Applications Up to 35,000 RPM
- ▶ Rigid Design for Excellent Ramping
- ▶ Reduced Vibration in Heavy Cutting

ALU-POWER HPC 3-FLUTE END MILLS

▶▶▶ The Anatomy of Efficiency


Specialized Design of Corner Gash

- ▶ Unique flute design and superior corner protection enhance both tool life and protection against catastrophic failure in high feed applications
- ▶ Polished flutes for excellent chip flow



Cylindrical Land

- ▶ Increased performance in a variety of cutting conditions
- ▶ Helps reduce vibration and chatter

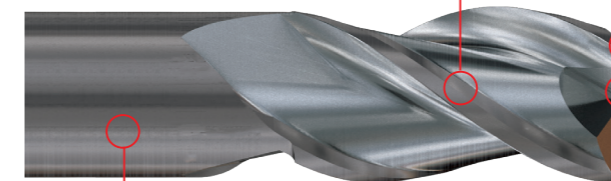

Available in a Wide Variety of Sizes and Corner Radius

Ideal Symmetrical Shape

- ▶ 3-flute design "to the center" (all 3 flutes come to center)
- ▶ Designed with high spindle speeds in mind
- ▶ Highly effective in vertical ramping up to 20 degrees and step-over plunging applications

DLC Diamond-Like Carbon

- ▶ Excels in hard aluminum and high speeds
- ▶ Provides edge strength and unsurpassed tool life



Engineered Flute Design

- ▶ Effective chip evacuation at high feed rates with lower cutting forces than competitive products



While other 3-flute End mills can muster up the speed for rough cutting aluminum, few can make it through without melting down the aluminum that surrounds the work itself. That's where the ALU-POWER HPC has a distinct advantage – speed, strength and sharpness.


Why ALU-POWER HPC Keeps Its Edge Under Tough Conditions

ALU-POWER HPC's highly polished 3-flute design provides more balanced cutting performance – without excessive heat buildup. In fact, while other End mills can gum up at surface speeds of 3,000 or less, ALU-POWER HPC keeps its cool by dissipating heat and providing outstanding chip evacuation. Adding it to its ultra-micrograin carbide design, the results are:

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

What do you get when you add 3-flute to the center, polished ultra-micrograin carbide, extra-large chip gullets and a razor-sharp cylindrical land design? In technical terms, it's called the ALU-POWER HPC. In a machinist's term, it's called an extremely sharp, highly durable milling monster that won't back down, cut after cut.

Compared to conventional aluminum-specific End mills, the ALU-POWER HPC provides more versatile performance. Its high-performance design allows you to cut deeper and run at faster cutting speeds.

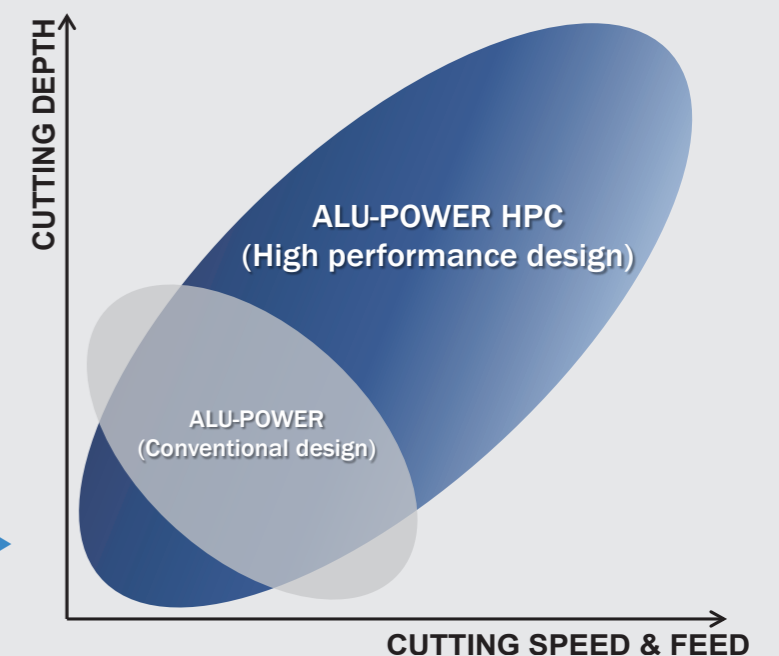

From Side Cuts to Rough Cuts to Aggressive Ramping, No One Withstands Extreme Radial Forces Better-or Longer.



▲ Rough Cutting

Ultra-micrograin carbide supplies the rigidity to keep the chips flying. Highly polished 3-flute design ensures they'll keep flying – cut after cut.



▲ Ramping

In steep, aggressive ramping conditions, the ALU-POWER HPC holds its own to resist the torsional stress from extreme helical output.



▲ Side cutting

No one offers a cooler-running super high-speed End mill. While others melt down the materials they're cutting, ALU-POWER HPC keeps machining cool in aluminum and soft alloys.

The Benefits of Balanced Cutting

When you lock an ALU-POWER HPC into your milling machine, you've unleashed the fastest-running, lowest-heat-producing End mill in the business. And that means you've got the speed and sharpness to take on not only the tough materials but also even more fragile mixed alloy castings with ease. Discover the ALU-POWER HPC and start pushing your productivity higher.




Another Advantage of YG-1's Perfect Geometry and Superior Coating

Whether you're running parts in today's most advanced 5-axis machining centers on the market today, or in machines built decades ago, ALU-POWER HPC makes the most of your manufacturing assets. That's because its unique 3-flute, 37-degree helix design can operate at lower speeds with higher efficiency.

CASE STUDY

TEST I Slotting Application


Ø12.7(R2.28) 3 Flute Corner radius

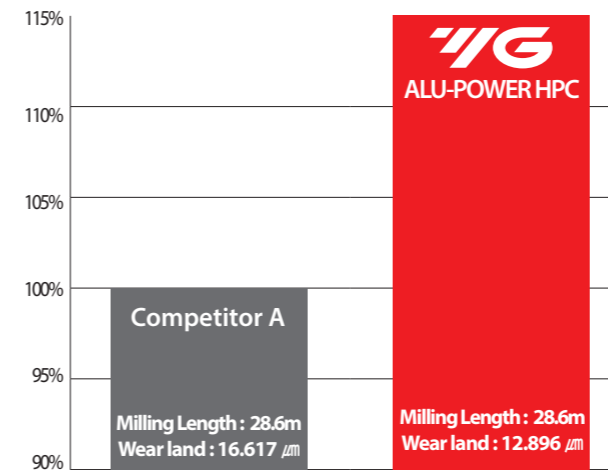

Cutting Condition (Slotting)


Tool	Ø12.7(R2.28) x Ø12.7 x 31.75 x 88.9
Work Material	AL7075
R.P.M (rev./min.)	12,224
IPM (mm/min.)	5,588
Cutting Depth (mm)	12.7 (Axial)
Coolant	Wet Cut (9% emulsion)
Overhang (mm)	48
Milling Method	Slotting
Machine	Machining Center

Total Milling Length : 38m

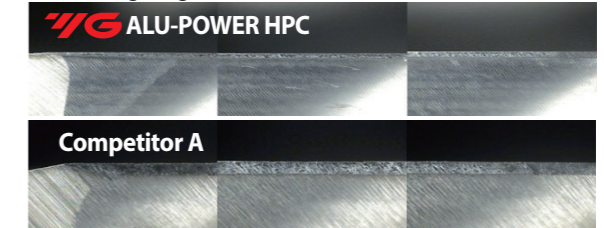

TEST II Pocketing Application



Ø12.7(R2.28) 3 Flute Corner radius

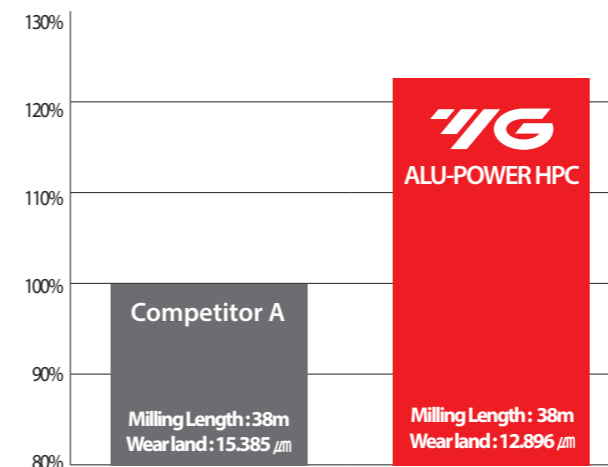


Cutting Condition (Pocketing)

Tool	Ø12.7(R2.28) x Ø12.7 x 31.75 x 88.9
Work Material	AL7075
R.P.M (rev./min.)	12,224
IPM (mm/min.)	5,588
Cutting Depth (mm)	12.7 (Axial) / 12.2 (Radial)
Coolant	Wet Cut (9% emulsion)
Overhang (mm)	48
Milling Method	Pocketing
Machine	Machining Center


Total Milling Length : 38m

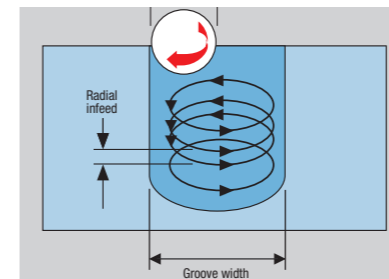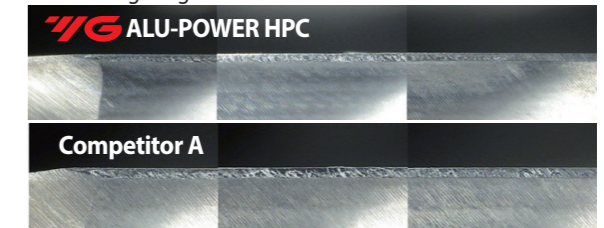

In trochoidal milling applications, the cutter follows a spiral path by moving radially as it rotates providing faster machining times, lower tooling costs and reduced loads on machine components.

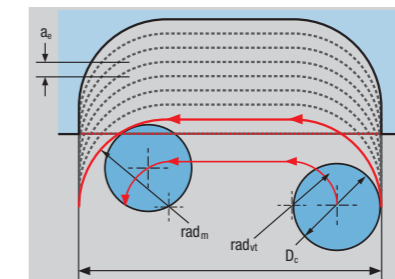

Peel milling applications benefit from ALU-POWER HPC's super sharp high-speed milling ability.

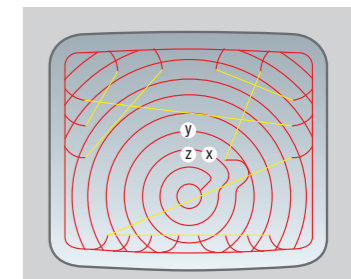

Outstanding chip evacuation through deep gullet design coupled with high speed milling leaves **a well-defined clean cutter path.**



ALU-POWER HPC NEW CHIP BREAKER 3-FLUTE END MILLS

- Unique Geometry provides the Balance cutting with less vibration during the High Speed Machining.
- Provides long tool life and high productivity on aluminum by Chip breaker releasing stresses on the tool and prevents acceleration rate of wear on the cutting edge.
- Chip Breaker Improves chip evacuation by shortening the chip length during the High Speed Machining.


CASE STUDY

TEST Chip Breakers - Side Cutting Application


Ø12.7(R0.76) 3 Flute Chip Breakers

Cutting Conditions	
Tool	Ø12.7(R0.76) x Ø12.7 x 31.75 x 76.2
Work Material	Al7075
R.P.M (rev./min.)	16,800
FEED(mm/min.)	3,835
Cutting Depth (mm)	19.05 (Axial=1.5D) 4,445 (Radial=0.35D)
Coolant	Wet Cut
Holder	BT40 - High Feed Milling Chuck
Milling Method	Profiling
Machine	Machining Center



Cutting Resistance

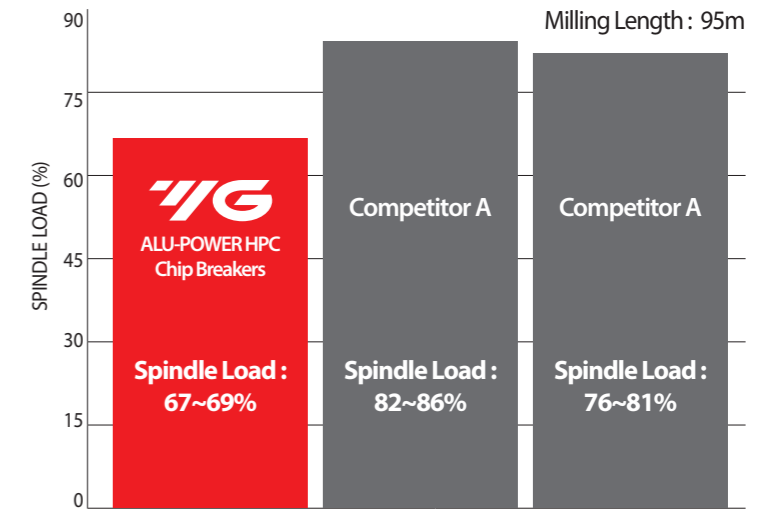

Cutting Edge (Total Milling Length : 95m)

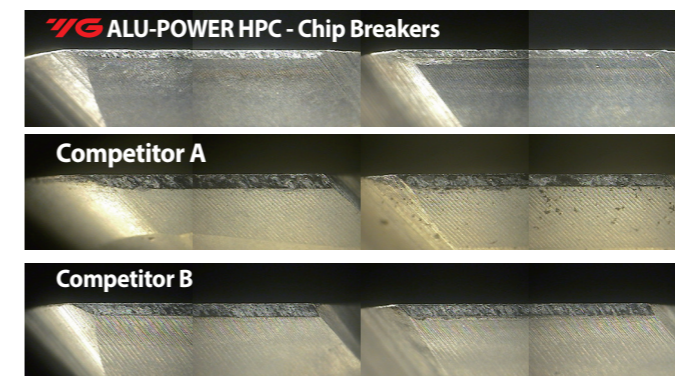


Surface Roughness

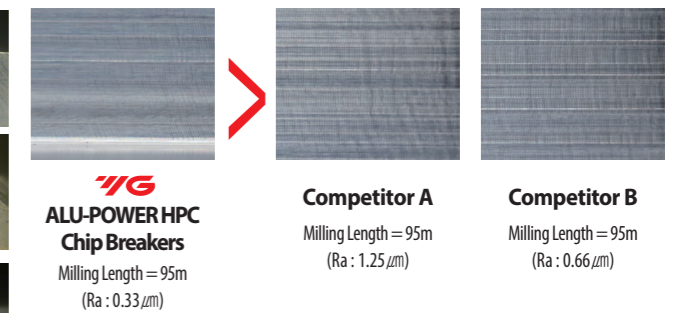


Chip Breakers

- ▶ Through Special Chip Breaker Design, the length of the chip is formed short to improve chip evacuation performance.

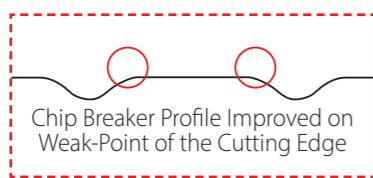

Optimized Chip Breaker Profile Design

- ▶ Optimized Chip Breaker Profile design boasts the best performance in Aluminum high-speed processing.



General End mill Chip Geometry



Chip Breaker End mill Chip Geometry





Unique Geometries

- ▶ Applied suitable Flute Design for Aluminum high speed machining to have an effective chip evacuation effect.
- ▶ Excellent Corner Protect Design improves tool life.



Cylindrical Land

- ▶ Improves tool performance by reducing vibration and chattering in high-speed processing.



Premium Tungsten Carbide

- ▶ Excellent wear resistance by using Premium Carbide material.

GUIDE TO ICONS




The tool is made of micrograin carbide



Helix Angle



Tool Ends:
Square / Corner Radius



No. of Flutes



Type of Shank



Cutting Conditions

SERIES	E5H24 JAH24	E5H25 JAH25	E5H22 JAH22	E5H23 JAH23
FLUTE	3	3	3	3
HELIX ANGLE	37°	37°	37°	37°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE
SIZE MIN	D6.0	D6.0	D3.0	D6.0
SIZE MAX	D20.0	D20.0	D25.0	D20.0
PAGE	10	13	16	17

SERIES	E5I86 E5I87
FLUTE	3
HELIX ANGLE	37°
CORNER RADIUS	
SIZE MIN	D6.0
SIZE MAX	D20.0
PAGE	18

SOLID CARBIDE
ALU-POWER HPC
END MILLS

3-Flute, High-Performance,
For Aluminum, Aluminum Die Cast,
Non-Ferrous Alloys And Plastics

	-	EXTENDED NECK	-	EXTENDED NECK
	Uncoated	Uncoated	Uncoated	Uncoated
	DLC	DLC	DLC	DLC



CHIP BREAKER



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.19-21

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc						
P	1	Non-alloy steel	About 0.15% C	Annealed	125						
	2		About 0.45% C	Annealed	190	13					
	3		About 0.45% C	Quenched & Tempered	250	25					
	4		About 0.75% C	Annealed	270	28					
	5		About 0.75% C	Quenched & Tempered	300	32					
	6	Low alloy steel		Annealed	180	10					
	7			Quenched & Tempered	275	29					
	8			Quenched & Tempered	300	32					
	9			Quenched & Tempered	350	38					
	10		High alloyed steel, and tool steel		Annealed	200	15				
	11			Quenched & Tempered	325	35					
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15					
	13		Martensitic	Quenched & Tempered	240	23					
	14		Austenitic		180	10					
K	15	Grey cast iron	Pearlitic / ferritic		180	10					
	16		Pearlitic (Martensitic)		260	26					
	17	Nodular cast iron	Ferritic		160	3					
	18		Pearlitic		250	25					
	19		Ferritic		130						
20	Malleable cast iron	Pearlitic		230	21						
N	21	Aluminum-wrought alloy	Not Curable		60		◎	◎	◎	◎	
	22		Curable	Hardened	100		◎	◎	◎	◎	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		◎	◎	◎	◎	
	24		≤ 12% Si, Curable	Hardened	90		◎	◎	◎	◎	
	25		> 12% Si, Not Curable		130		○	○	○	○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		○	○	○	○	
	27		CuZn, CuSnZn (Brass)		90		○	○	○	○	
	28		CuSn, lead-free copper and electrolytic copper		100		○	○	○	○	
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				○	○	○	○
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33			Annealed	250	25					
	34			Ni or Co Based	Cured	350	38				
	35			Cast	320	34					
	36	Titanium Alloys	Pure Titanium		400 Rm						
37	Alpha + Beta Alloys		Hardened	1050 Rm							
H	38	Hardened steel		Hardened	550	55					
	39			Hardened	630	60					
	40		Chilled Cast Iron	Cast	400	42					
	41		Hardened Cast Iron	Hardened	550	55					

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41


Scan QR Code to See Catalogue
AEROSPACE SOLUTIONS & COMPOSITE MATERIALS



HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS

SERIES
UNCOATED **E5H24**
DLC COATED **JAH24**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

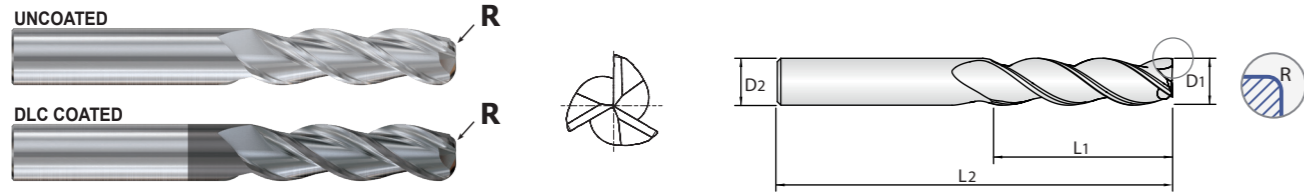

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
Uncoated	DLC	R	D1	D2	L1	L2
E5H24060	JAH24060	R0.5	6.0	6	13	57
E5H24901	JAH24901	R1.0	6.0	6	13	57
E5H24902	JAH24902	R1.5	6.0	6	13	57
E5H24903	JAH24903	R0.8	6.0	6	13	72
E5H24904	JAH24904	R1.2	6.0	6	13	72
E5H24905	JAH24905	R0.5	6.0	6	24	75
E5H24906	JAH24906	R1.0	6.0	6	24	75
E5H24080	JAH24080	R0.3	8.0	8	19	63
E5H24907	JAH24907	R0.5	8.0	8	19	63
E5H24908	JAH24908	R1.0	8.0	8	19	63
E5H24909	JAH24909	R1.5	8.0	8	19	63
E5H24910	JAH24910	R0.5	8.0	8	32	75
E5H24911	JAH24911	R1.0	8.0	8	32	75
E5H24912	JAH24912	R1.5	8.0	8	32	75
E5H24913	JAH24913	R2.0	8.0	8	32	75
E5H24100	JAH24100	R0.3	10.0	10	22	72
E5H24914	JAH24914	R0.5	10.0	10	22	72
E5H24915	JAH24915	R1.0	10.0	10	22	72
E5H24916	JAH24916	R1.5	10.0	10	22	72
E5H24917	JAH24917	R0.5	10.0	10	40	100

NEXT PAGE ▶

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K																												
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	3	18	25	19	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	
Recommend																																											

ISO Material Description	N					S										H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys					Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44		
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS

SERIES
UNCOATED **E5H24**
DLC COATED **JAH24**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

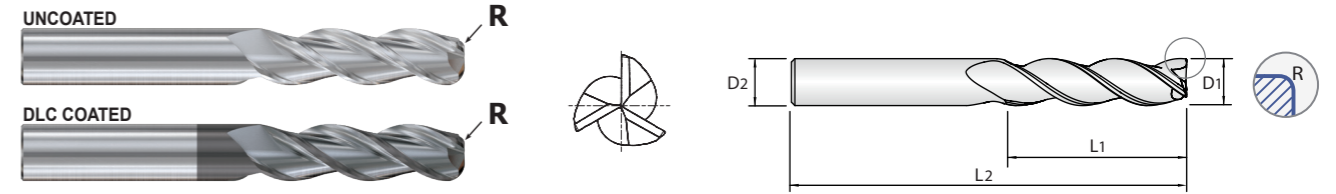

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
Uncoated	DLC	R	D1	D2	L1	L2
E5H24918	JAH24918	R1.0	10.0	10	40	100
E5H24919	JAH24919	R1.5	10.0	10	40	100
E5H24920	JAH24920	R2.0	10.0	10	40	100
E5H24120	JAH24120	R1.5	12.0	12	26	83
E5H24921	JAH24921	R2.0	12.0	12	26	83
E5H24922	JAH24922	R2.5	12.0	12	26	83
E5H24923	JAH24923	R3.0	12.0	12	26	83
E5H24924	JAH24924	R0.5	12.0	12	48	100
E5H24925	JAH24925	R1.0	12.0	12	48	100
E5H24926	JAH24926	R1.5	12.0	12	48	100
E5H24927	JAH24927	R2.0	12.0	12	48	100
E5H24928	JAH24928	R2.5	12.0	12	48	100
E5H24929	JAH24929	R3.0	12.0	12	48	100
E5H24140	JAH24140	R1.0	14.0	14	30	89
E5H24930	JAH24930	R2.0	14.0	14	30	89
E5H24931	JAH24931	R3.0	14.0	14	30	89
E5H24160	JAH24160	R1.5	16.0	16	32	92
E5H24932	JAH24932	R2.0	16.0	16	32	92
E5H24933	JAH24933	R2.5	16.0	16	32	92
E5H24934	JAH24934	R3.0	16.0	16	32	92

NEXT PAGE ▶

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K																											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	3	18	25	19	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	
Recommend																																										

ISO Material Description	N					S										H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys					Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44		
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS

SERIES
UNCOATED **E5H24**
DLC COATED **JAH24**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

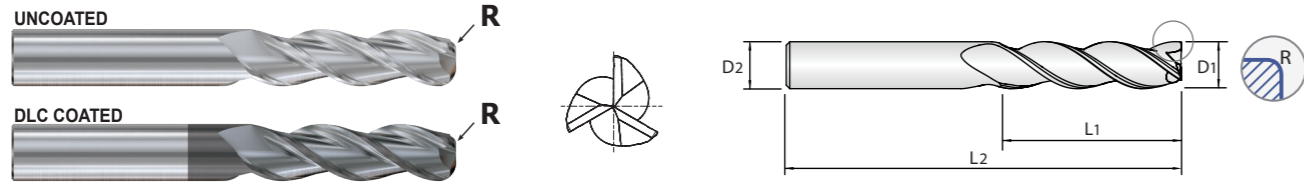

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
Uncoated	DLC	R	D1	D2	L1	L2
E5H24935	JAH24935	R4.0	16.0	16	32	92
E5H24936	JAH24936	R0.5	16.0	16	64	125
E5H24937	JAH24937	R1.0	16.0	16	64	125
E5H24938	JAH24938	R1.5	16.0	16	64	125
E5H24939	JAH24939	R2.0	16.0	16	64	125
E5H24940	JAH24940	R2.5	16.0	16	64	125
E5H24941	JAH24941	R3.0	16.0	16	64	125
E5H24942	JAH24942	R4.0	16.0	16	64	125
E5H24200	JAH24200	R2.0	20.0	20	38	104
E5H24943	JAH24943	R2.5	20.0	20	38	104
E5H24944	JAH24944	R3.0	20.0	20	38	104
E5H24945	JAH24945	R4.0	20.0	20	38	104
E5H24946	JAH24946	R0.5	20.0	20	80	150
E5H24947	JAH24947	R1.0	20.0	20	80	150
E5H24948	JAH24948	R1.5	20.0	20	80	150
E5H24949	JAH24949	R2.0	20.0	20	80	150
E5H24950	JAH24950	R2.5	20.0	20	80	150
E5H24951	JAH24951	R3.0	20.0	20	80	150
E5H24952	JAH24952	R4.0	20.0	20	80	150

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

◎ : Excellent ○ : Good


ISO	P										M				K																												
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																						
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	21																												
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																							
Recommend																																											

ISO	N					S										H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys					Hardened steel	Chilled Cast Iron	Hardened Cast Iron									
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44			
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550						
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS with EXTENDED NECK

SERIES
UNCOATED **E5H25**
DLC COATED **JAH25**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

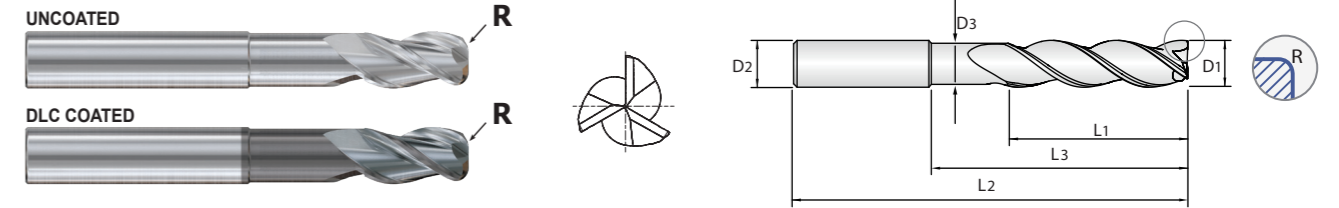

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
Uncoated	DLC	R	D1	D2	L1	L3	L2	D3
E5H25060	JAH25060	R0.5	6.0	6	10	20	63	5.7
E5H25901	JAH25901	R1.0	6.0	6	10	20	63	5.7
E5H25902	JAH25902	R0.5	6.0	6	13	30	72	5.7
E5H25903	JAH25903	R1.0	6.0	6	13	30	72	5.7
E5H25080	JAH25080	R0.3	8.0	8	12	25	75	7.4
E5H25904	JAH25904	R0.5	8.0	8	12	25	75	7.4
E5H25905	JAH25905	R0.8	8.0	8	12	25	75	7.4
E5H25906	JAH25906	R1.0	8.0	8	12	25	75	7.4
E5H25907	JAH25907	R1.2	8.0	8	12	25	75	7.4
E5H25908	JAH25908	R1.5	8.0	8	12	25	75	7.4
E5H25909	JAH25909	R1.6	8.0	8	12	25	75	7.4
E5H25100	JAH25100	R0.3	10.0	10	14	35	100	9.2
E5H25910	JAH25910	R0.5	10.0	10	14	35	100	9.2
E5H25911	JAH25911	R0.8	10.0	10	14	35	100	9.2
E5H25912	JAH25912	R1.0	10.0	10	14	35	100	9.2
E5H25913	JAH25913	R1.2	10.0	10	14	35	100	9.2
E5H25914	JAH25914	R1.5	10.0	10	14	35	100	9.2
E5H25915	JAH25915	R1.6	10.0	10	14	35	100	9.2

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

◎ : Excellent ○ : Good


ISO	P										M				K																											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																					
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	21																											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																						
Recommend																																										

ISO	N					S										H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys					Hardened steel	Chilled Cast Iron	Hardened Cast Iron									
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44			
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550						
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HIGH-PERFORMANCE SOLID CARBIDE END MILLS
CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS with EXTENDED NECK

SERIES
 UNCOATED **E5H25**
 DLC COATED **JAH25**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

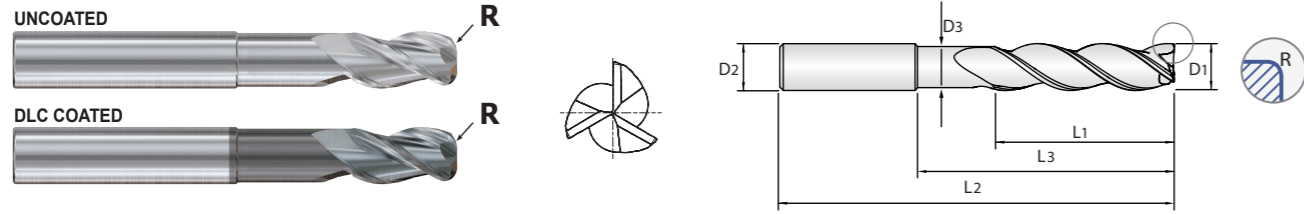

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
Uncoated	DLC	R	D ₁	D ₂	L ₁	L ₃	L ₂	D ₃
E5H25916	JAH25916	R2.4	10.0	10	14	35	100	9.2
E5H25120	JAH25120	R0.5	12.0	12	16	40	100	11.0
E5H25917	JAH25917	R0.8	12.0	12	16	40	100	11.0
E5H25918	JAH25918	R1.0	12.0	12	16	40	100	11.0
E5H25919	JAH25919	R1.2	12.0	12	16	40	100	11.0
E5H25920	JAH25920	R1.5	12.0	12	16	40	100	11.0
E5H25921	JAH25921	R1.6	12.0	12	16	40	100	11.0
E5H25922	JAH25922	R2.0	12.0	12	16	40	100	11.0
E5H25923	JAH25923	R2.4	12.0	12	16	40	100	11.0
E5H25924	JAH25924	R2.5	12.0	12	16	40	100	11.0
E5H25925	JAH25925	R3.0	12.0	12	16	40	100	11.0
E5H25926	JAH25926	R4.0	12.0	12	16	40	100	11.0
E5H25140	JAH25140	R1.0	14.0	14	18	45	125	13.0
E5H25927	JAH25927	R2.0	14.0	14	18	45	125	13.0
E5H25928	JAH25928	R3.0	14.0	14	18	45	125	13.0
E5H25929	JAH25929	R4.0	14.0	14	18	45	125	13.0
E5H25160	JAH25160	R0.8	16.0	16	20	50	125	15.0
E5H25930	JAH25930	R1.2	16.0	16	20	50	125	15.0

NEXT PAGE ▶

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	h5

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎											

HIGH-PERFORMANCE SOLID CARBIDE END MILLS
CARBIDE, 3 FLUTE 37° HELIX CORNER RADIUS with EXTENDED NECK

SERIES
 UNCOATED **E5H25**
 DLC COATED **JAH25**

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

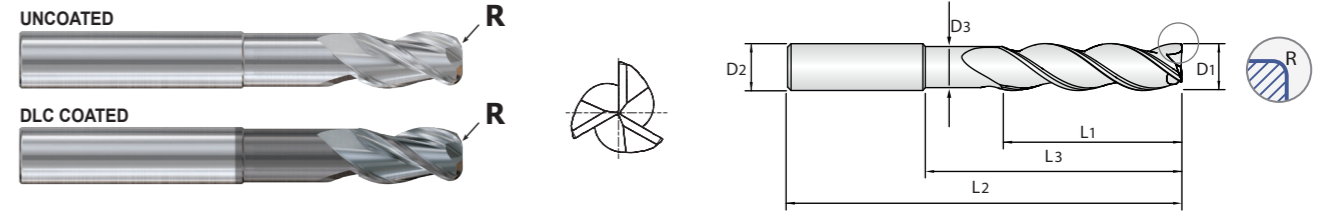

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
Uncoated	DLC	R	D ₁	D ₂	L ₁	L ₃	L ₂	D ₃
E5H25931	JAH25931	R1.6	16.0	16	20	50	125	15.0
E5H25932	JAH25932	R2.0	16.0	16	20	50	125	15.0
E5H25933	JAH25933	R2.4	16.0	16	20	50	125	15.0
E5H25934	JAH25934	R2.5	16.0	16	20	50	125	15.0
E5H25935	JAH25935	R3.0	16.0	16	20	50	125	15.0
E5H25936	JAH25936	R3.2	16.0	16	20	50	125	15.0
E5H25937	JAH25937	R4.0	16.0	16	20	50	125	15.0
E5H25200	JAH25200	R0.8	20.0	20	25	65	150	19.0
E5H25938	JAH25938	R1.2	20.0	20	25	65	150	19.0
E5H25939	JAH25939	R1.6	20.0	20	25	65	150	19.0
E5H25940	JAH25940	R2.0	20.0	20	25	65	150	19.0
E5H25941	JAH25941	R2.4	20.0	20	25	65	150	19.0
E5H25942	JAH25942	R2.5	20.0	20	25	65	150	19.0
E5H25943	JAH25943	R3.0	20.0	20	25	65	150	19.0
E5H25944	JAH25944	R3.2	20.0	20	25	65	150	19.0
E5H25945	JAH25945	R4.0	20.0	20	25	65	150	19.0

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	h5


◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎											

HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

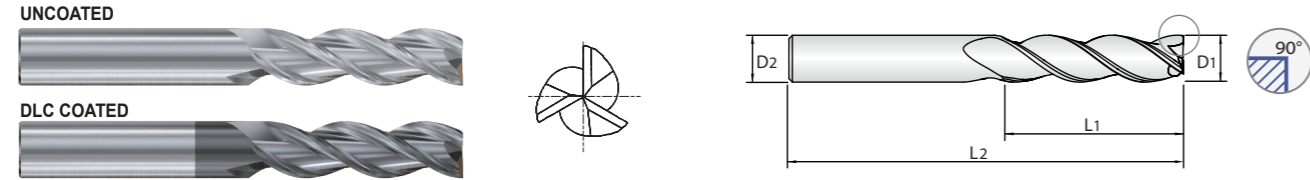

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
Uncoated	DLC	D1	D2	L1	L2
E5H22030	JAH22030	3.0	6	8	52
E5H22040	JAH22040	4.0	6	11	55
E5H22050	JAH22050	5.0	6	13	57
E5H22060	JAH22060	6.0	6	13	57
E5H22901	JAH22901	6.0	6	13	72
E5H22902	JAH22902	6.0	6	24	75
E5H22080	JAH22080	8.0	8	19	63
E5H22903	JAH22903	8.0	8	32	75
E5H22100	JAH22100	10.0	10	22	72
E5H22904	JAH22904	10.0	10	40	100
E5H22120	JAH22120	12.0	12	26	83
E5H22905	JAH22905	12.0	12	48	100
E5H22140	JAH22140	14.0	14	30	89
E5H22160	JAH22160	16.0	16	32	92
E5H22906	JAH22906	16.0	16	64	125
E5H22200	JAH22200	20.0	20	38	104
E5H22907	JAH22907	20.0	20	80	150
E5H22250	JAH22250	25.0	25	50	125

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø3	+/-0.006	h5
Over ø3 ~ up to ø6	+/-0.008	
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
Over ø16	+/-0.013	


◎ : Excellent ○ : Good

ISO	P										M				K																										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	21																										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommend																																									

ISO	N					S					H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron										
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○																

HIGH-PERFORMANCE SOLID CARBIDE END MILLS CARBIDE, 3 FLUTE 37° HELIX with EXTENDED NECK

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ More efficient chip evacuation
- ▶ Ability to counteract extreme radial forces
- ▶ DLC Coating provides edge strength and unsurpassed tool life

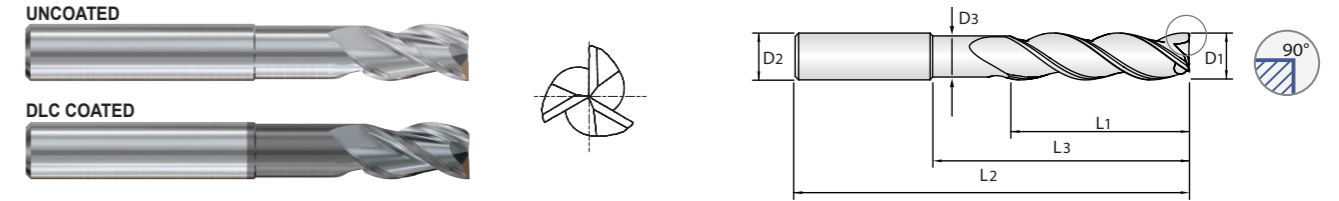

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
Uncoated	DLC	D1	D2	L1	L3	L2	D3
E5H23060	JAH23060	6.0	6	10	20	75	5.7
E5H23080	JAH23080	8.0	8	12	25	75	7.4
E5H23100	JAH23100	10.0	10	14	35	100	9.2
E5H23120	JAH23120	12.0	12	16	40	100	11.0
E5H23140	JAH23140	14.0	14	18	45	125	13.0
E5H23160	JAH23160	16.0	16	20	50	125	15.0
E5H23200	JAH23200	20.0	20	25	65	150	19.0

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

◎ : Excellent ○ : Good


ISO	P										M				K																										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	13	25	28	32	38	15	35	15	23	10	10	26	3	25	21																										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommend																																									

ISO	N					S					H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron										
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○																

HIGH-PERFORMANCE SOLID CARBIDE END MILLS NEW 3-FLUTE EXTENDED LENGTH - CHIP BREAKER

- ▶ Balanced cutting with less vibration
- ▶ Ability to run at higher speeds with less heat in aluminum
- ▶ Chip Breaker Improves chip evacuation by shortening the chip length
- ▶ Ability to counteract extreme radial forces


PLAIN SHANK **E5186**
FLAT SHANK **E5187**

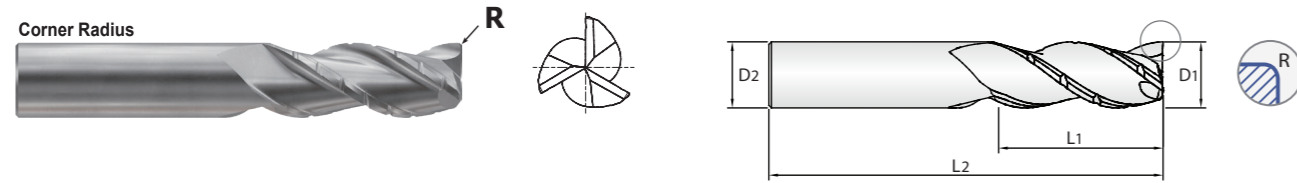

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
E5186060	E5187060	R0.25	6.0	6	13	57
E5186902	E5187902	R0.25	6.0	6	24	75
E5186080	E5187080	R0.25	8.0	8	19	63
E5186905	E5187905	R0.25	8.0	8	32	75
E5186100	E5187100	R0.5	10.0	10	22	72
E5186908	E5187908	R0.5	10.0	10	40	100
E5186120	E5187120	R0.5	12.0	12	26	83
E5186911	E5187911	R0.5	12.0	12	48	100
E5186160	E5187160	R1.0	16.0	16	32	92
E5186914	E5187914	R1.0	16.0	16	64	125
E5186200	E5187200	R1.0	20.0	20	38	104
E5186917	E5187917	R1.0	20.0	20	80	150
E5186901	E5187901	R1.5	6.0	6	13	57
E5186903	E5187903	R1.5	6.0	6	24	75
E5186904	E5187904	R2.0	8.0	8	19	63
E5186906	E5187906	R2.0	8.0	8	32	75
E5186907	E5187907	R2.0	10.0	10	22	72
E5186909	E5187909	R2.0	10.0	10	40	100
E5186910	E5187910	R3.0	12.0	12	26	83
E5186912	E5187912	R3.0	12.0	12	48	100
E5186913	E5187913	R4.0	16.0	16	32	92
E5186915	E5187915	R4.0	16.0	16	64	125
E5186916	E5187916	R4.0	20.0	20	38	104
E5186918	E5187918	R4.0	20.0	20	80	150

Mill Diameter Tolerances (mm)		Shank Diameter Tolerance
Diameter	Tolerance	
ø6	+/-0.008	h5
Over ø6 ~ up to ø10	+/-0.009	
Over ø10 ~ up to ø16	+/-0.011	
ø20	+/-0.013	

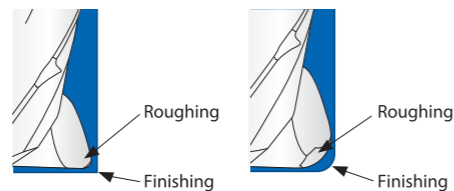

◎ : Excellent ○ : Good


ISO	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
HRC	13	15	17	19	21	23	25	27	29	31	33	35	37	39	41	43	45	47	49	51	53	55	57	59	61	63	65	67	69	71	73	75	77	79	81	83	85	87	89	91	93	95	97	99	101	103	105	107	109	111	113	115	117	119	121	123	125	127	129	131	133	135	137	139	141	143	145	147	149	151	153	155	157	159	161	163	165	167	169	171	173	175	177	179	181	183	185	187	189	191	193	195	197	199	201	203	205	207	209	211	213	215	217	219	221	223	225	227	229	231	233	235	237	239	241	243	245	247	249	251	253	255	257	259	261	263	265	267	269	271	273	275	277	279	281	283	285	287	289	291	293	295	297	299	301	303	305	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339	341	343	345	347	349	351	353	355	357	359	361	363	365	367	369	371	373	375	377	379	381	383	385	387	389	391	393	395	397	399	401	403	405	407	409	411	413	415	417	419	421	423	425	427	429	431	433	435	437	439	441	443	445	447	449	451	453	455	457	459	461	463	465	467	469	471	473	475	477	479	481	483	485	487	489	491	493	495	497	499	501	503	505	507	509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	547	549	551	553	555	557	559	561	563	565	567	569	571	573	575	577	579	581	583	585	587	589	591	593	595	597	599	601	603	605	607	609	611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	647	649	651	653	655	657	659	661	663	665	667	669	671	673	675	677	679	681	683	685	687	689	691	693	695	697	699	701	703	705	707	709	711	713	715	717	719	721	723	725	727	729	731	733	735	737	739	741	743	745	747	749	751	753	755	757	759	761	763	765	767	769	771	773	775	777	779	781	783	785	787	789	791	793	795	797	799	801	803	805	807	809	811	813	815	817	819	821	823	825	827	829	831	833	835	837	839	841	843	845	847	849	851	853	855	857	859	861	863	865	867	869	871	873	875	877	879	881	883	885	887	889	891	893	895	897	899	901	903	905	907	909	911	913	915	917	919	921	923	925	927	929	931	933	935	937	939	941	943	945	947	949	951	953	955	957	959	961	963	965	967	969	971	973	975	977	979	981	983	985	987	989	991	993	995	997	999	1001	1003	1005	1007	1009	1011	1013	1015	1017	1019	1021	1023	1025	1027	1029	1031	1033	1035	1037	1039	1041	1043	1045	1047	1049	1051	1053	1055	1057	1059	1061	1063	1065	1067	1069	1071	1073	1075	1077	1079	1081	1083	1085	1087	1089	1091	1093	1095	1097	1099	1101	1103	1105	1107	1109	1111	1113	1115	1117	1119	1121	1123	1125	1127	1129	1131	1133	1135	1137	1139	1141	1143	1145	1147	1149	1151	1153	1155	1157	1159	1161	1163	1165	1167	1169	1171	1173	1175	1177	1179	1181	1183	1185	1187	1189	1191	1193	1195	1197	1199	1201	1203	1205	1207	1209	1211	1213	1215	1217	1219	1221	1223	1225	1227	1229	1231	1233	1235	1237	1239	1241	1243	1245	1247	1249	1251	1253	1255	1257	1259	1261	1263	1265	1267	1269	1271	1273	1275	1277	1279	1281	1283	1285	1287	1289	1291	1293	1295	1297	1299	1301	1303	1305	1307	1309	1311	1313	1315	1317	1319	1321	1323	1325	1327	1329	1331	1333	1335	1337	1339	1341	1343	1345	1347	1349	1351	1353	1355	1357	1359	1361	1363	1365	1367	1369	1371	1373	1375	1377	1379	1381	1383	1385	1387	1389	1391	1393	1395	1397	1399	1401	1403	1405	1407	1409	1411	1413	1415	1417	1419	1421	1423	1425	1427	1429	1431	1433	1435	1437	1439	1441	1443	1445	1447	1449	1451	1453	1455	1457	1459	1461	1463	1465	1467	1469	1471	1473	1475	1477	1479	1481	1483	1485	1487	1489	1491	1493	1495	1497	1499	1501	1503	1505	1507	1509	1511	1513	1515	1517	1519	1521	1523	1525	1527	1529	1531	1533	1535	1537	1539	1541	1543	1545	1547	1549	1551	1553	1555	1557	1559	1561	1563	1565	1567	1569	1571	1573	1575	1577	1579	1581	1583	1585	1587	1589	1591	1593	1595	1597	1599	1601	1603	1605	1607	1609	1611	1613	1615	1617	1619	1621	1623	1625	1627	1629	1631	1633	1635	1637	1639	1641	1643	1645	1647	1649	1651	1653	1655	1657	1659	1661	1663	1665	1667	1669	1671	1673	1675	1677	1679	1681	1683	1685	1687	1689	1691	1693	1695	1697	1699	1701	1703	1705	1707	1709	1711	1713	1715	1717	1719	1721	1723	1725	1727	1729	1731	1733	1735	1737	1739	1741	1743	1745	1747	1749	1751	1753	1755	1757	1759	1761	1763	1765	1767	1769	1771	1773	1775	1777	1779	1781	1783	1785	1787	1789	1791	1793	1795	1797	1799	1801	1803	1805	1807	1809	1811	1813	1815	1817	1819	1821	1823	1825	1827	1829	1831	1833	1835	1837	1839	1841	1843	1845	1847	1849	1851	1853	1855	1857	1859	1861	1863	1865	1867	1869	1871	1873	1875	1877	1879	1881	1883	1885	1887	1889	1891	1893	1895	1897	1899	1901	1903	1905	1907	1909	1911	1913	1915	1917	1919	1921	1923	1925	1927	1929	1931	1933	1935	1937	1939	1941	1943	1945	1947	1949	1951	1953	1955	1957	1959	1961	1963	1965	1967	1969	1971	1973	1975	1977	1979	1981	1983	1985	1987	1989	1991	1993	1995	1997	1999	2001	2003	2005	2007	2009	2011	2013	2015	2017	2019	2021	2023	2025	2027	2029	2031	2033	2035	2037	2039	2041	2043	2045	2047	2049	2051	2053	2055	2057	2059	2061	2063	2065	2067	2069	2071	2073	2075	2077	2079	2081	2083	2085	2087	2089	2091	2093	2095	2097	2099	2101	2103	2105	2107	2109	2111	2113	2115	2117	2119	2121	2123	2125	2127	2129	2131	2133	2135	2137	2139	2141	2143	2145	2147	2149	2151	2153	2155	2157	2159	2161	2163	2165	2167	2169	2171	2173

E5H22, JAH22, E5H23, JAH23 SERIES

3 FLUTE - SLOTTING


RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)						
						3.0	6.0	10.0	12.0	16.0	20.0	25.0
N	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	488	488	488	488	488	488	488
					fz	0.025	0.076	0.114	0.152	0.168	0.191	0.254
					RPM	51778	25889	15533	12945	9708	7767	6213
					FEED	3946	5918	5326	5918	4883	4439	4735
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	183	183	183	183	183	183	183
					fz	0.025	0.076	0.114	0.152	0.168	0.191	0.254
					RPM	19417	9708	5825	4854	3641	2913	2330
					FEED	1480	2219	1997	2219	1831	1665	1775
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	268	268	268	268	268	268	268
					fz	0.020	0.051	0.102	0.127	0.140	0.152	0.178
					RPM	28436	14218	8531	7109	5332	4265	3412
					FEED	1733	2167	2600	2708	2235	1950	1820
29.1	Non Metallic Materials	1.0D	1.0D	Vc	503	503	503	503	503	503	503	
				fz	0.038	0.102	0.191	0.254	0.279	0.305	0.356	
				RPM	53370	26685	16011	13342	10007	8005	6404	
				FEED	6100	8134	9150	10167	8388	7320	6832	

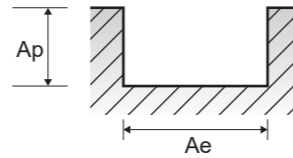


3 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)						
						3.0	6.0	10.0	12.0	16.0	20.0	25.0
N	21~22	Aluminum-wrought alloy	0.5D	1.5D	Vc	610	610	610	610	610	610	610
					fz	0.025	0.076	0.114	0.152	0.168	0.191	0.254
					RPM	64723	32361	19417	16181	12136	9708	7767
					FEED	4932	7398	6658	7398	6103	5548	5918
	23~25	Aluminum-cast, alloyed	0.5D	1.5D	Vc	244	244	244	244	244	244	244
					fz	0.025	0.076	0.114	0.152	0.168	0.191	0.254
					RPM	25889	12945	7767	6472	4854	3883	3107
					FEED	1973	2959	2663	2959	2441	2219	2367
	26-28	Copper and Copper Alloys (Bronze / Brass)	0.5D	1.5D	Vc	351	351	351	351	351	351	351
					fz	0.020	0.051	0.102	0.127	0.140	0.152	0.178
					RPM	37242	18621	11173	9311	6983	5586	4469
					FEED	2270	2838	3405	3547	2927	2554	2384
29.1	Non Metallic Materials	0.5D	1.5D	Vc	625	625	625	625	625	625	625	
				fz	0.038	0.102	0.191	0.254	0.279	0.305	0.356	
				RPM	66314	33157	19894	16579	12434	9947	7958	
				FEED	7580	10106	11370	12633	10422	9096	8489	



3 FLUTE - SIDE CUTTING HSM (Light)

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)						
						3.0	6.0	10.0	12.0	16.0	20.0	25.0
N	21~22	Aluminum-wrought alloy	0.05D	2.0D	Vc	1006	1006	1006	1006	1006	1006	1006
					fz	0.053	0.140	0.267	0.356	0.381	0.419	0.495
					RPM	106740	53370	32022	26685	20014	16011	12809
					FEED	17080	22367	25621	28467	22876	20131	19033
	23~25	Aluminum-cast, alloyed	0.05D	2.0D	Vc	366	366	366	366	366	366	366
					fz	0.053	0.140	0.267	0.356	0.381	0.419	0.495
					RPM	38834	19417	11650	9708	7281	5825	4660
					FEED	6214	8138	9321	10357	8323	7324	6924
	26-28	Copper and Copper Alloys (Bronze / Brass)	0.05D	2.0D	Vc	564	564	564	564	564	564	564
					fz	0.043	0.114	0.216	0.292	0.330	0.356	0.406
					RPM	59842	29921	17953	14961	11220	8976	7181
					FEED	7752	10260	11628	13110	11115	9576	8755
29.1	Non Metallic Materials	0.05D	2.0D	Vc	1021	1021	1021	1021	1021	1021	1021	
				fz	0.086	0.229	0.432	0.584	0.635	0.699	0.813	
				RPM	108331	54166	32499	27083	20312	16250	13000	
				FEED	28066	37147	42100	47465	38695	34051	31699	




E5I86, E5I87 SERIES

3 FLUTE CORNER RADIUS - SLOTTING


RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)				
						6.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	488	488	488	488	488
					fz	0.076	0.114	0.152	0.168	0.191
					RPM	25889	15533	12945	9708	7767
					FEED	5918	5326	5918	4883	4439
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	183	183	183	183	183
					fz	0.076	0.114	0.152	0.168	0.191
					RPM	9708	5825	4854	3641	2913
					FEED	2219	1997	2219	1831	1665
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	268	268	268	268	268
					fz	0.051	0.102	0.127	0.14	0.152
					RPM	14218	8531	7109	5332	4265
					FEED	2167	2600	2708	2235	1950
29.1	Non Metallic Materials	1.0D	1.0D	Vc	503	503	503	503	503	
				fz	0.102	0.191	0.254	0.279	0.305	
				RPM	26685	16011	13342	10007	8005	
				FEED	8134	9150	10167	8388	7320	



3 FLUTE CORNER RADIUS - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)				
						6.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	0.5D	1.5D	Vc	610	610	610	610	610
					fz	0.076	0.114	0.152	0.168	0.191
					RPM	32361	19417	16181	12136	9708
					FEED	7398	6658	7398	6103	5548
	23~25	Aluminum-cast, alloyed	0.5D	1.5D	Vc	244	244	244	244	244
					fz	0.076	0.114	0.152	0.168	0.191
					RPM	12945	7767	6472	4854	3883
					FEED	2959	2663	2959	2441	2219
	26-28	Copper and Copper Alloys (Bronze / Brass)	0.5D	1.5D	Vc	351	351	351	351	351
					fz	0.051	0.102	0.127	0.14	0.152
					RPM	18621	11173	9311	6983	5586
					FEED	2838	3405	3547	2927	2554
29.1	Non Metallic Materials	0.5D	1.5D	Vc	625	625	625	625	625	
				fz	0.102	0.191	0.254	0.279	0.305	
				RPM	33157	19894	16579	12434	9947	
				FEED	10106	11370	12633	10422	9096	





HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TÜRKIYE
CZECH REPUBLIC	GERMANY	NORWAY	SWEDEN	UNITED KINGDOM	DENMARK
HUNGARY	POLAND	SERBIA	SWITZERLAND	AUSTRIA	GREECE
ALBANIA	BOSNIA AND HERZEGOVINA	UKRAINE	UZBEKISTAN	BULGARIA	
ESTONIA					

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SOUTH KOREA	VIETNAM
CHINA	ISRAEL	PAKISTAN	TAIWAN	
HONG KONG	JAPAN	PHILIPPINES	THAILAND	
INDIA	SAUDI ARABIA	SINGAPORE	UNITED ARAB EMIRATES	

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

<https://www.yg1.kr>

E-mail: yg1@yg1.kr

ALU-POWER HPC

Keep Your Edge:
SPEED, STRENGTH & SHARPNESS.



Scan this QR code to
see our ALU-POWER HPC tools at work.

YG YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Notice YG-1 Global head office is relocating from December 2020 to a new address as above;

Phone: +82-32-526-0909


www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1YEHPC230811002